

PERFECT TIME SHOWER PANEL

SELF-CLOSING ELECTRONIC SHOWER PANEL

SPECIFICATIONS

Self-closing electronic shower panel. Activated by touching the designated piezo button. For cold and premixed water, non-return valves and filters. With an aluminum panel and WRAS approved Shower Head. Powered by a 9V Battery box or a 9V transformer. The battery box is located behind the panel with easy access. Includes a vandal resistant shower head with easily cleaned silicone nozzles. The water flow will automatically shut off after a factory set flow time of 2 minutes. Flow time is adjustable on site. Includes an adjustable 24 hour hygiene activation.

OPERATION

When users touch the designated area in the middle of the piezo button, a flow cycle of 2 minutes is activated. A second touch stops the water flow before the default flow time has passed.

APPLICATION


The easy touch activation allows for use by young children, the elderly and the disabled. Ideal for outdoor and indoor applications, retrofit installations, hospitals, hotels, spas, resorts, swimming pools, gyms and private residences.

PRODUCT AT A GLANCE

Installation	Exposed
Power Supply	<ul style="list-style-type: none"> • 9V battery • 9V transformer
Operating pressure	0.5-8.0 bar / 7.0-116.0 PSI
Water supply	Hot and cold water
Water flow	9 LPM / 2.38 GPM
Water Saving Options	3.5 LPM/0.93 GPM, 4LPM/1.05 GPM, 5 LPM/1.32 GPM 6 LPM/1.59 GPM, 7 LPM/1.85 GPM
Water Temperature	Maximum 70°C

ORDERING INFORMATION

MODEL	CODE	POWER
PERFECT TIME SHOWER PANEL B	601400	9V battery box
PERFECT TIME SHOWER PANEL E	603400	9V Transformer

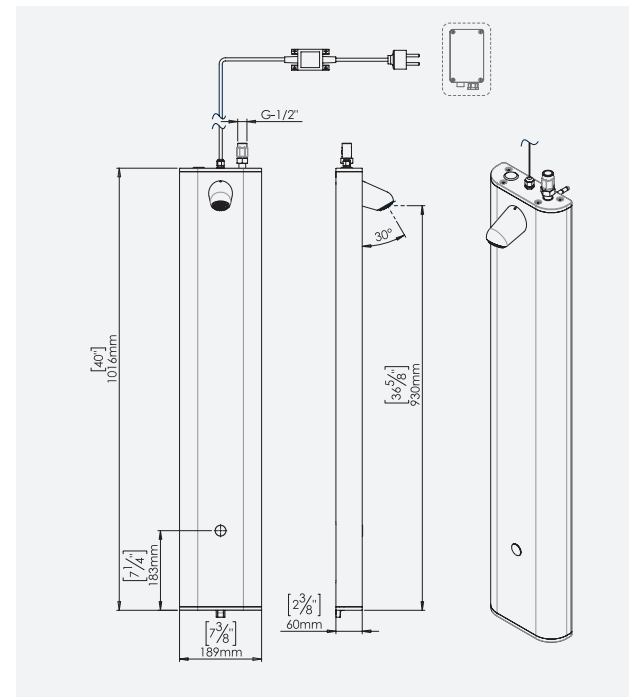

ADVANTAGES



APPROVALS



777 Passaic Avenue
Clifton NJ, 07012
USA: sternusa@sternfaucets.com
International: info@sternfaucets.com
Toll Free: 1-800-4364410
www.sternfaucets.com